




**MOSAICOS  
SOLANA**

**CONCRETE SLABS** for use as  
cement adhesive testing support

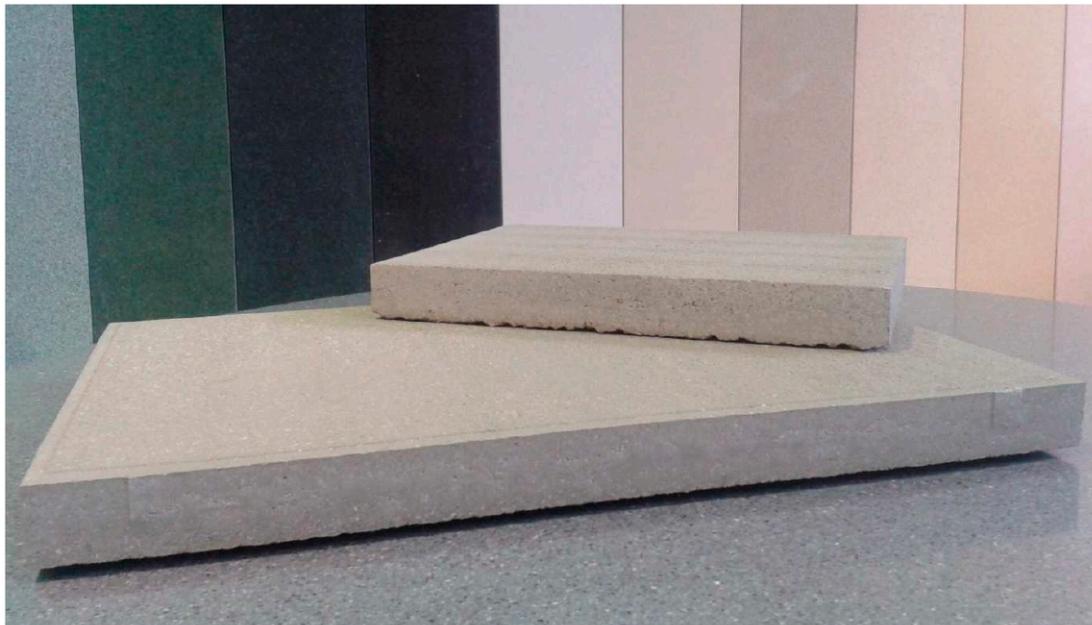

## Sheet

**CONCRETE SLABS** made in an automatically way, under pressing ( $150 \text{ Kg/cm}^2$ ) and vibration conditions, for absorbing excess water from the mixing, getting the best concrete compaction ever.

Concrete slabs are suitable for use as cement adhesive testing support according to standard number **UNE-EN 12004-2**: Adhesives for tiles. Concrete slabs for test.



**MOSAICOS SOLANA S.A.**

Avda. de la Estación 29 • 26500 Calahorra • La Rioja

T. +34 941 130 150 • [mosaicos-solana.com](http://mosaicos-solana.com) • [info@mosaicos-solana.com](mailto:info@mosaicos-solana.com)

## CONCRETE SLABS for use as cement adhesive testing support

### TECHNICAL SHEET

Features as cement adhesive testing support in order to determining the mechanical properties of the adhesive for tiles, according to the standard number **UNE-EN 12004-2**.

⇒ Water-Absorption test on the slab surface with Carsten-Rohrchen pipe.

⇒ Tensile strength.

| Test                                     | Slab 1 | Slab 2 | Slab 3 | Standard specification              |
|--|--------|--------|--------|-------------------------------------|
| Water-Absorption Test (cm <sup>3</sup> ) | 1,2    | 1,0    | 1,2    | Between 0,5 and 1,5 cm <sup>3</sup> |
| Tensile strength (N/mm <sup>2</sup> )    | 2,75   | 2,89   | 2,32   | > 1,5                               |

### DIMENSIONS AND PACKAGING

| SIZES             | UD/EUROPALLET |
|-------------------|---------------|
| 60x40x4,5 cm.     | 52            |
| 29,7x40x4,5 cm.   | 104           |
| 19,7x40x4,5 cm.   | 156           |
| 19,7x29,7x4,5 cm. | 208           |
| 60x19,7x4,5 cm.   | 104           |
| 40x40x4,5 cm.     | 104           |

- Current tax charge at delivery time.
- Incoterm EX WORKS.
- Slabs are placed upright into the pallet, with thermal protection.
- Pallets free.